






Single hydrostatic drive motor coupled to a JCB differential axle ensures reliable continuous drive for long distance travel

Combilift 4 Wheel Sideloader

Combilift 4 Wheel Sideloader



Ref.	Description	C5000 4WSL	C6000 4WSL
1a	Max. Lift Height	4040mm	
1b	Freelift Height	0mm	
2	Height Mast Closed	3035mm	
3	Max. (Mast raised)	5150mm	
4	Overall Width	2000mm	2200mm
5	Mast Travel	1250mm	1450mm
6	Ground Clearance Under Mast	240mm	
7	Ground Clearance to Centre of Wheelbase	240mm	
8	Height Over Cab (Without work - lights)	2730mm	
9	Length	4560mm	
10	Frame Opening	1400mm	
11	Track	1713mm	
12	Outside Spread of Fork Arms	1350mm	
13	Load Centre Distance	600mm	
14	Overhang Front	820mm	
15	Wheelbase	2510mm	
16	Overhang Back	1130mm	
17	Length From Face of Fork	800mm	
18	Forward Tilt	4°	3°
19	Backward Tilt	5°	
20	Minimum Outside Radius	4200mm	
21	Platform Height	920mm	
22	Platform Length	1200mm	1400mm
A	Capacity	5000 kg	6000 kg
B	Unladen Weight	7500 kg	9150 kg
C	Maximum Ground Speed	25km/h	
D	Gradability	15%	
E	Deutz TCD 3.6 L4 (Stage IIIB)	75kW	
F	Electrics	12 Volt	
G	Fork Section 50mm x 200mm	1200mm	1400mm
H	Pneumatic/Super Elastic Front Tyre	8.25 - 15	300 - 15
I	Pneumatic/Super Elastic Rear Tyre	8.25 - 15	300 - 15
J	Standard Colour	Yellow & Grey	
K	Suspension Seat	KAB Model 116	

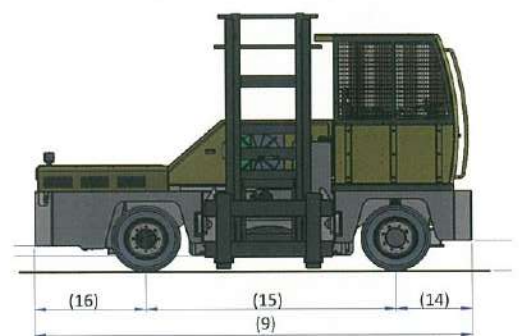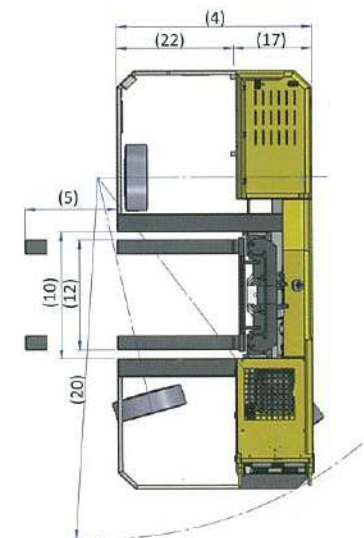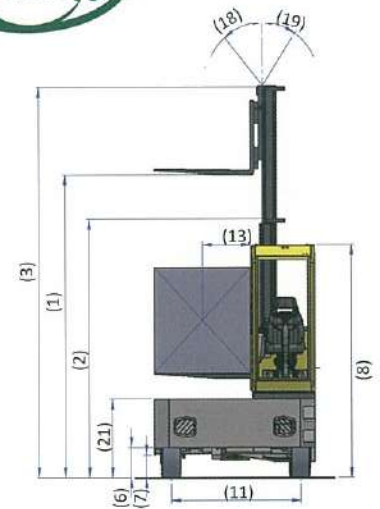

FEATURES INCLUDE:

- Hydraulic Suspended Cabin
- Wet Disc Brakes
- 2 Wheel Drive
- Load Sensing Steering
- Tilting Chassis
- Hydraulic Oil Cooler

